

BEVERAGE-AIR

3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax# 1-336-245-6453 http://www.Beverage-Air.com

CUSTOMER'S CHOICE FOR A HOT KITCHEN Tested & Certified to Ambient Class of 100°F

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

UCRY/UCF SERIES UNDERCOUNTER UNITS

Compact shallow depth undercounter refrigerators and freezers with stainless steel exterior, heavy duty construction including durable sub top, 120° stay-open field reversible doors with cartridge style hinges & snap-in door gaskets.

CABINET CONSTRUCTION

20" and 27" base models designed to fit in limited space with stainless steel exterior and aluminum interior. Heavy duty construction with durable 1/2" insulated sub-top and 2" thick CFC and HCFC-free foamed-in-place polyurethane insulation. Cartridge style hinges with black anodized aluminum pull style door handles and 120° stay-open door feature. Snap-in-place vinyl magnetic gaskets. Standard options: 6" casters standard and 2 steel wire epoxy coated shelves per door section.

REFRIGERATION

Balanced interior forced air system with high humidity evaporator coils. Refrigeration system operates at 36° to 38°F for optimal food preservation while freezer model temperature is held at 0°F and below. Refrigerators and freezers utilize environmentally friendly refrigerants. Refrigerators use R134a and freezers use R404A refrigerants. Both are CFC and HCFC-free providing full compliance with environmental safety standards.

ELECTRICAL

Units wired at factory and ready for connection to a 115/60/1 phase, 15 amp dedicated outlet. 8' long cord and plug set included.

AVAILABLE ACCESSORIES

- Roller kir
- Stacking collars (20 & 27 models only)
- Shelf dividers
- Overshelf kits
- Richlite and composite cutting boards

OPTIONAL UPGRADES

- LED lighting (glass door refrigerators—not available on UCF27)
- Left hand hinge door(s) (excludes UCR34Y)
- Stainless steel interior
- Left hinge door(s) & 3" casters packed
- Door locks
- Door thermometer

SHALLOW DEPTH UNDERCOUNTER REFRIGERATORS AND FREEZERS FOOD PREPARATION SERIES

MODELS: UCR20Y UCF20 UCF24 UCR27Y UCF27 UCF27 UCR34Y



ELECTRICAL CONNECTION

Units pre-wired at factory and include 8' long cord and plug set.













Available From:

| Model Specified | Store# |
|-----------------|----------|
| Location | Quantity |




PLAN VIEWS

Shallow Depth

UCR34 FRONT

| Undercounter Refr Models: UCR20Y, UCF | | | F27, UCR34Y | , | | | OPENING 15 3/4* x 18 3/16" HT |
|--|--------------------|--------------------|---------------------|-------------------|-------------------|----------------|---------------------------------|
| MODEL | UCR20Y | UCF20 | UCF24 | UCR27Y | UCF27 | UCR34Y | 31 1/8" 16" INSIDE |
| EXTERNAL DIMENSIONAL DATA | | | | | | | OVERALL HT 25" |
| Length Overall (inches) Length Overall (mm) | 20" 508 | 20" 508 | 24" 609 | 27" 686 | 27" 686 | 34" 864 | DOOR 20" X 22 3/16" HT |
| Depth Overall (inches) - Less handle Depth Overall (mm) - Less handle | 22" 559 | 22" 559 | 25 3/4" 654 | 27 3/4" 705 | 27 3/4" 705 | 23 5/8" 600 | FRONT VIEW UCR/UCF20 FRONT |
| Height Overall— on 6" legs (inches) Height Overall—on 6" legs (mm) | 31 1/8" 791 | 31 1/8" 791 | 34 1/2" 876 | 34 1/2" 876 | 34 1/2" 876 | 31" 787 | 23" OVERALL DEPTH (with handle) |
| Depth with Door Open 90 ° | 40 1/2" | 40 1/2" | 48 7/8" | 53 1/4" | 53 1/4" | 38" | |
| Clear Door Opening (inches) | 15 3/4" x 18 3/16" | 15 3/4" x 18 3/16" | 21 9/16" x 19 9/16" | 22 1/2" x 21 3/8" | 22 1/2" x 21 3/8" | 13/ 1/8" x 18" | 20" CABINET |
| Number of doors | 1 | 1 | 1 | 1 | 1 | 2 | Ť ******* Ť |
| INTERNAL DIMENSIONAL DATA | | | | | | | 13" |
| NET Capacity (cubic ft.) NET Capacity (Liters) | 2.7 77 | 2.7 77 | 5.8 164 | 6.2 176 | 6.2 176 | 5.5 156 | |
| Internal Length Overall (inches) Internal Length Overall (mm) | 16" 406 | 16" 406 | 20" 508 | 23" 584 | 23" 584 | 29 3/8" 746 | |
| Internal Depth Overall (inches) Internal Depth Overall (mm) | 13" 330 | 13" 330 | 19 7/8" 505 | 18" 457 | 18" 457 | 17" 432 | 10 1/4" |
| Internal Height Overall (inches) Internal Height Overall (mm) | 19" 483 | 19" 483 | 23" 584 | 23" 584 | 23" 584 | 19" 483 | END VIEW UCR/UCF20 END |
| Number of shelves | 2 | 2 | 2 | 2 | 2 | 4 | 00.000.00 |
| ELECTRICAL DATA | | | | | | | |
| Full Load Amperes 115/60/1 | 3.0 | 5.3 | 6.0 | 4.0 | 6.0 | 4.0 | 23 1/2" |
| ENERGY CONSUMPTION (KWH) | 2.73 | 6.18 | N/A | 2.79 | N/A | 3.12 | |
| REFRIGERATION DATA | | | | | | | 23" 23" 21 3/8" 000% DPENNS |
| Horsepower | 1/6 | 1/4 | 1/4 | 1/6 | 1/4 | 1/5 | 34 1/2" 23" hs |
| WEIGHT DATA | | | | | | | |
| Gross Weight (Crated lbs) | 113 | 114 | 130 | 157 | 165 | 164 | FRONTVIEW |
| Gross Weight (Crated kg) | 51 | 51 | 60 | 71 | 74 | 75 | |

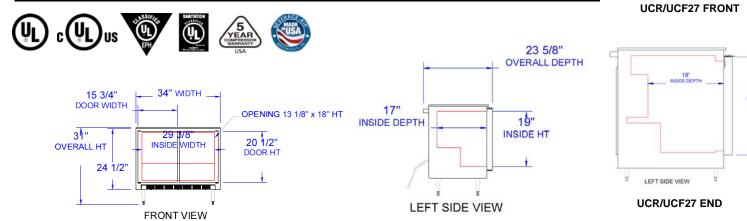

UCR34 FRONT